

DESCRIPTION

The **GEFCO Select #EE151NC LED Submersible Niche Mounted Light Fixture** is constructed to provide relative narrow dispersion of light and provides a single color rendition for low to medium range height spray effects or waterfalls. Lighting boards are in solid white, green, red, blue or amber. They can also be mounted in a slab hung or freestanding application. The light has available projection beam angles of up to 35°. It is equipped with a clear convex glass lens (flat lens optional). The angle of the light fixture can be adjusted to a max. of 10°.

Limits for this fixture is 45 Watts MAX. at 12VDC, 24VDC or 12VAC UNI power supply. These fixtures are to be connected to a common commercially available Class2 12VDC or 24VDC Power Supply or a U.L. Listed 12VAC swimming pool transformer. Connections are made to standard U.L. Listed Underwater Deck Mounted Junction Boxes such as GEFCO Select #EE138 series using U.L. Listed cord seals such as GEFCO Select #EE137 Series Internal Cord Seals.

This light should be operated submerged up to 12" (30CM), wet location ok. **DO NOT operate DRY.** For best light disbursement flat lense configuration is recommended.

TYPICAL SPECIFICATIONS:

*** GEFCO Select #EE151NC-YY-ZZ
Freestanding Submersible Light Fixture:**


- cast bronze body & face ring, SST fitted.
- YY = specify color (WHite, AMber, REd, BLue or GRen).
- 45 Watt, 12VDC, 24VDC or 12VAC.
- 15 feet of (18/5) single SOOW cable.
- ZZ = beam angle specify 20° or 35° (20° standard)°.
- clear tempered convex glass lens (flat lens optional).
- silicon lens gaskets.
- 304 SST and bronze fitted housing.
- rated IP68 to 30CM, for use in wet conditions.
- 3/4" drain fitting (sold seperately) specify bottom or side.
- **ROCK GUARD NOT INCLUDED** (sold seperately).

OPTIONAL ITEMS:


- ZZ = Beam angles. Available are 20° or 35°(specify).
- YY = Color. Specify WH, RD, GR, BL, AM (white, red, green, blue, amber)
- Flat Lens.
- GEFCO Select #EE151N-10 Rock Guard.
- 3/4" drain fitting (specify bottom or side mounted).
- CORD LENGTH - Cable longer than 15'- 0" is optional and can be supplied at an extra cost. However, only 10'- 0" of **exposed** cable is permissible per NEC.

IMPORTANT

The designers, installers and end users utilizing the electrical equipment described herein assume full responsibility for the compliance with the N.E.C. and it's applicable articles, intents and consequences. Where the manufacturer and/or the supplier of the electrical equipment described herein does not control the application or usage, he assumes no responsibility whatsoever for any consequences arising out of the application, installation and/or usage of this or any other equipment and/or materials.

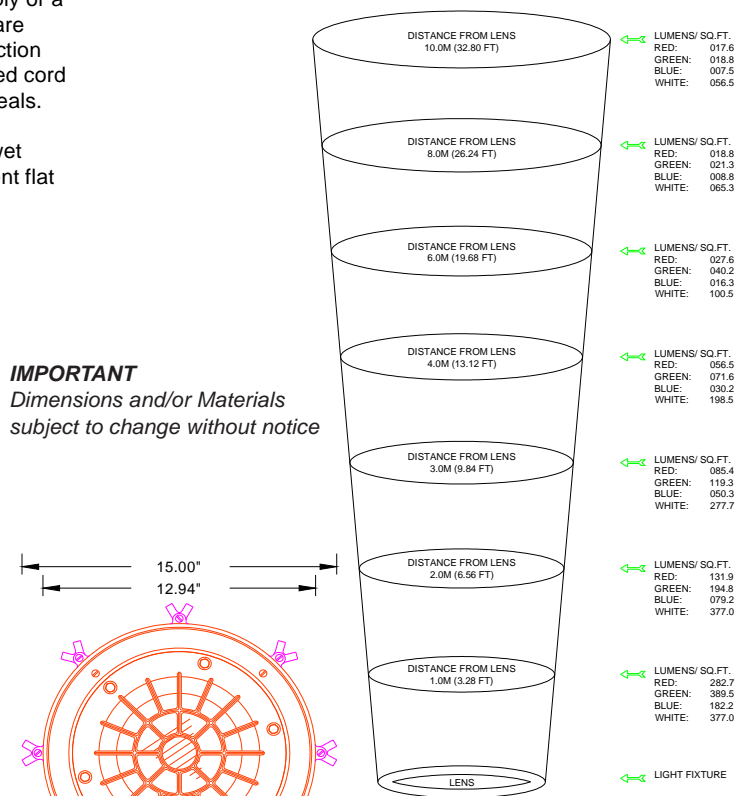

IMPORTANT
*Dimensions and/or Materials
subject to change without notice*

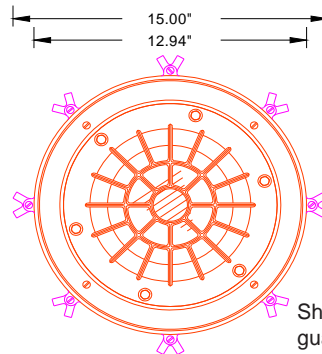

Shown with rock optional guard

