

**DESCRIPTION**

The **GEFCO Select #PE107 Small Sump Fixture** provides piping termination for both supply water or suction piping. The fitting may be provided with either bottom or side connections for piping. The fixture may also be utilized for 2" piping. In addition to a single main piping entry, there is an extra 2" piping connection that may be utilized for drainage of a particular pool or as a small equalizing line termination. It is not recommended to terminate two suction lines, two supply lines, or combination of both, into this fitting.

The Sump Body is constructed of tough Cylolac plastic with female threaded connections for piping or pipe fittings. The body has an integral water stop flange that is embedded in floor when the fixture is cast into place.

An optional anti-vortex plate is then placed over the top of the fixture to prevent vortex and potential cavitation of pump.

**IMPORTANT NOTE:**

Use this fitting for up to a max. of 40 GPM.

**TYPICAL SPECIFICATIONS:**

**\* GEFCO Select #PE107 Sump:**

- hi-impact Cylolac plastic body.
- 8" dia. Cylolac anti-vortex plate.
- 2" N.P.T. female bottom and side connections with 2" plastic male N.P.T. plug.


**IMPORTANT NOTE:**

Order Stainless Steel Anti-Vortex plate (GEFCO #PE108-E) separately.

**TYPICAL SPECIFICATIONS:**

**\* GEFCO #PE108-E 12" Square Anti-Vortex Plate:**

- 12" square, 1/4" tile set.
- made of all stainless steel construction

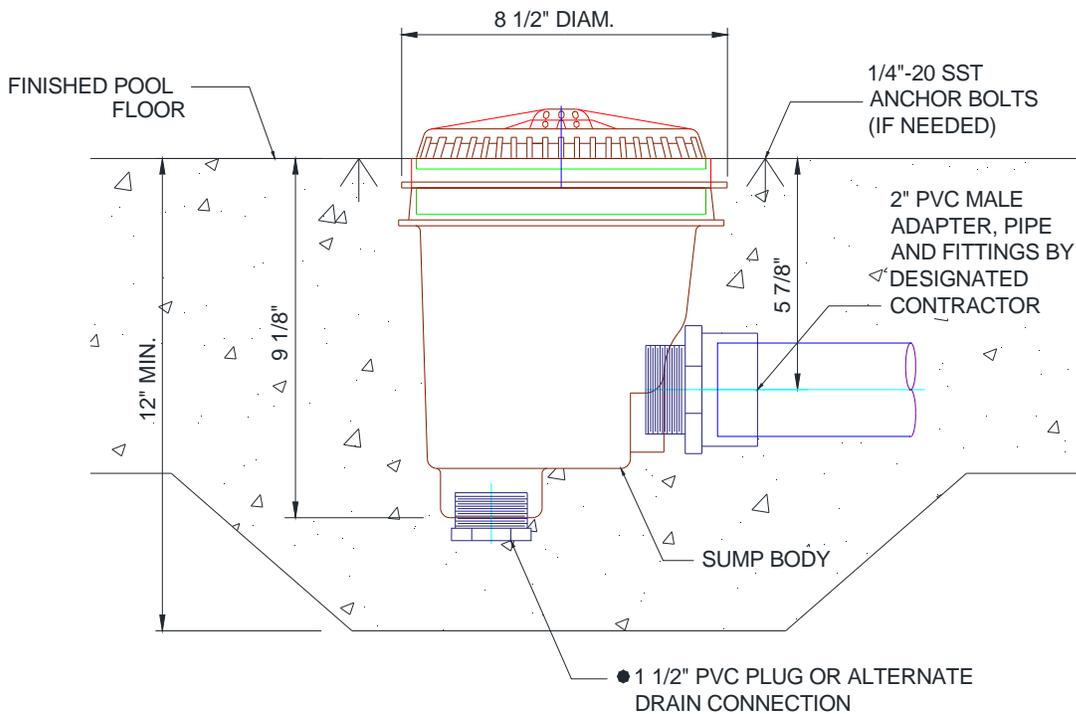

**IMPORTANT**

*Dimensions and/or Materials subject to change without notice*