

DESCRIPTION

The **GEFCO Select #PE109-BRS Series Slab Penetrations** provide cast in place, waterproof stub-ups for piping entering the fountain basin. A water stop flange placed in the center of the slab penetration serves as both a leak proof device to prevent water migrating along the outer edges of the pipe, and as a means for keeping the pipe in place and rigid once the concrete has cured.

The GEFCO #PE109-BRS Series Slab Penetration are available only in brass. See GEFCO # PE109-XX-SST for SST version. Penetrations are supplied with grounding screws for placement and connection of the code required #8 bond wire and grounding clamp (supplied by E.C.)

When specifying, please use the following suffix to ensure the proper size pipe connection fitting is provided:


GEFCO Select #PE109-XX-BRS

- Where XX is:
- 05 1/2" NPT Connection.
 - 07 3/4" NPT Connection.
 - 10 1" NPT Connection.
 - 12 1-1/4" NPT Connection.
 - 15 1-1/2" NPT Connection.
 - 20 2" NPT Connection.
 - 30 3" NPT Connection.
 - 40 4" NPT Connection.
 - 60 6" dia. copper tubing.

TYPICAL SPECIFICATIONS:

*** GEFCO #PE109-XX-BRS Slab Penetration:**

- brass water stop flange.
- XX" NPT Connection (specify)
- #10-24 SST bonding screw.

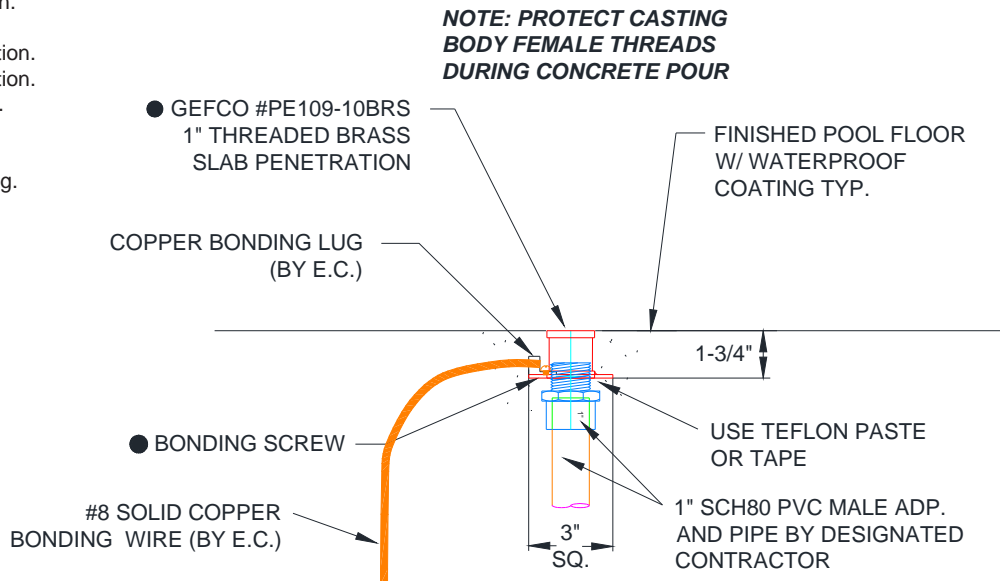

GEFCO #PE109-10BRS SHOWN

IMPORTANT

*Dimensions and/or Materials
subject to change without notice*