

**DESCRIPTION:**


The **GEFCO Select #SE01050 Flow Straightener** is typically used in ornamental fountains and are finished units that allow the decorative presentation of a stream of water with a better than average stream quality containing some exceptional cohesion of the water presented. A minimum debris strainer size of 3/16" is recommended on systems for most pipe sizes (see table below).

**TYPICAL SPECIFICATIONS:**

- \* **GEFCO Select #SE01050-X Flow Straightener:**
- made of machined brass.
- XX" NPT Inlet connection (specify - see table).
- XX GPM flow (specify - see table).
- flow insert.
- SST set screw.

**Replacement Parts:**

- NONE

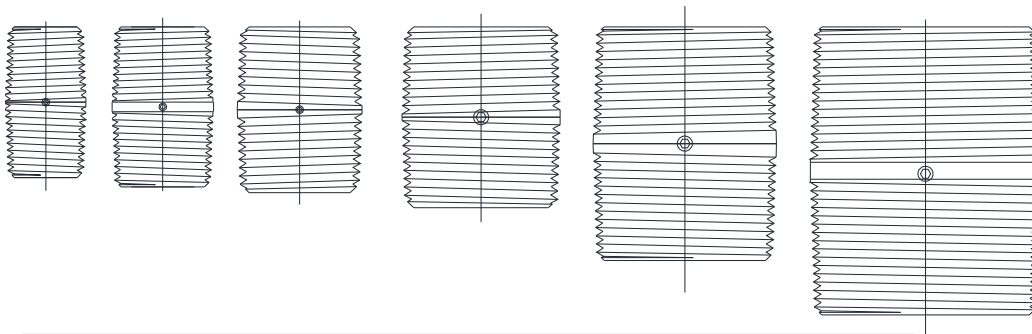

| #SE01050 | -05      | -07      | -10      | -12        | -15        | -20      |
|----------|----------|----------|----------|------------|------------|----------|
| T        | 1/2" NPT | 3/4" NPT | 1" NPT   | 1 1/4" NPT | 1-1/2" NPT | 2" NPT   |
| OV       | 1-3/16"  | 1-1/2"   | 1 5/8"   | 1 5/8"     | 1 3/4"     | 2 1/8"   |
| FL       | 18 GPM   | 45 GPM   | 60 GPM   | 80 GPM     | 106 GPM    | 120 GPM  |
| △ P      | 9.3' TDH | 9.3' TDH | 8.3' TDH | 7.3' TDH   | 6.6' TDH   | 6.6' TDH |
| SS       | 1/8"     | 1/8"     | 1/8"     | 1/8"       | 1/8"       | 1/8"     |

**IMPORTANT REQUIREMENT**

*Designers and Engineers shall be responsible for the accuracy of system flow rates and especially system head loss requirements. Stated flows and head pressure requirements for any listed spray height are required AT THE NOZZLE. Extrapolations for unlisted spray heights are at the sole responsibility of the Designers and/or Engineers.*

**IMPORTANT**

*Dimensions, Manufacturers and/or Materials subject to change without notice*