



GEFCO SELECT EE NANO1024 MULTIMEDIA Show Controller

DESCRIPTION

The **GEFCO Select #EE NANO1024 MUSIC MULTIMEDIA FOUNTAIN SHOW CONTROLLER** is the ideal stand-alone digital show controller for multimedia fountain systems. It features 8 each digital 24VDC inputs, 8 each digital 24VDC PNP outputs, 2 each 512 channels of DMX Universes Outputs, 1 each RJ45 Internet/ 10/100MB Port, 1 each 3.5MM Stereo Music Jack and a 2x16 LCD Display with 6 function buttons. The show controller can store up to 64GB of data (program & MP4 music files). The #EE NANO1024 Show Controller uses WDS Stream file + Audio files to execute the shows. It features an hour, day and year scheduler software add-on and pre-programmed modules such as wind & level controls that can be assigned to the on-board inputs and outputs.

Programming requires a licensed software key and program (sold separately) in 2 models:

a) **GEFCO Select #EE NANO1024 MUSIC ARCHITECT**. This software is the most comprehensive 3D visualization software and incorporates a programming console panel for live streaming programming of equipment associated with multi media shows (*SOLD SEPARATELY*). Pricing available upon request.

b) **GEFCO Select #EE NANO1024 WLP Windows Live Panel**. This version deletes the visualization and recording features in the Architect Version. This software is free and available at specified websites. This is a very basic program and requires skilled knowledge.

Programming can also be established using contract programming with your GEFCO Select #EE NANO1024 Music Programming Contractor. Contact the factory for pricing.


TYPICAL SPECIFICATIONS:

* GEFCO Select #EE NANO1024 MUSIC SHOW Controller:

- DIN Rail mounted (160MM x 90MM).
- 1 ea. 2x16 LCD display.
- 8 ea. Digital 24VDC optically isolated inputs.
- 8 ea. Digital 24VDC PNP 1A MAX. outputs.
- 1 ea. RJ45 10/100 MB ETHERNET port.
- 1 ea. 3.5MM STEREO digital music jack, Galvanic Isolated (preamp ONLY).
- 24VDC 8W MAX..
- 2 ea. 512 Channel DMX/RDM Universes ports.
- 1 ea. MINI SD Card holder compartment.
- 1 ea. Touchpad with 6 function buttons.
- Protection Class 20
- Operating Temperatures: -20 to +40 Deg. C.
- Certification: CE

OPTIONAL ITEMS (SOLD SEPARATELY):

- GEFCO Select #EE NANO1024 ARCHITECT Software with key.
- GEFCO Select #EE Mini SD Card (4,8,16,32 or 64 GB - Specify)

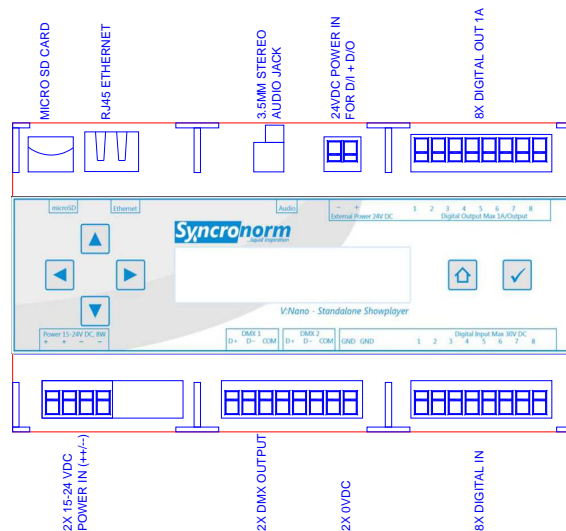

IMPORTANT

Dimensions and/or Materials
subject to change without notice