

**DESCRIPTION**

The **GEFCO Select #SE215-1 Fluid Switch Operated Stream Jet Assembly** is a fluid diverter unit that allows the rapid switching of fluid by non-mechanical means (no valve) in the main water stream. There is only one small solenoid valve that controls the atmospheric pressure inside the switch pathway. There are no shocks or water hammer in the water piping. Typical switching speed is an impressive fast 0.1 sec. The performance chart below is for a combination of the GEFECO Select #215 Fluid Switch when used with a GEFECO Select #SE105-16 stream jet with flow straightener (ordered separately).

The GEFECO select #SE215-1 Fluid Switch is typically connected directly to a GEFECO #PE109-15 slab penetration or with a high pressure hose to a GEFECO #PE109-15 slab penetration or common water manifold.

The GEFECO Select #SE215-1 Fluid Switch will operate in open air AS WELL AS TOTALLY SUBMERGED except for the Static Airline and the spray effect jet used. The Control Solenoid Valve is made of ALL SST and can be ordered in operating Voltages of 12, 24VAC OR 12, 24VDC (please specify).

The Main switch body is made of ultraviolet-resistant injection molded ABS Plastic and features a 1-1/2" NPT water connection, a 1-1/2" discharge and exhaust to the floor. The GEFECO Select #SE215 Fluid Switch will operate other spray effects as well. Consult the Factory for performances using other jets.

**IMPORTANT NOTE:**

**THE LISTED PERFORMANCE IS ONLY VALID WHEN USING GEFECO SELECT #SE105-21 STREAM JETS!**

**TYPICAL SPECIFICATIONS:**


- \* **GEFCO Select #SE215-1 Fluid Switch Operated Stream Jet:**
- 1-1/2" NPT Inlet.
- (2) 1-1/2" NPT Jet and exhaust outlet.
- UV Hardened ABS Injection Molded Plastic.
- Submersible 12/24VAC/VDC (Specify) ALL SST Solenoid valve
- 9 feet of UL Listed Submersible Cable (ST18/3).
- GEFECO Select #SE105-16 Stream jet, brass.
- GEFECO Custom 1-1/2" Flow straightener.

**ADDITIONAL INFORMATION:**

- \* **Suction Straining required to be: 0.125" MAX.**
- \* **ALL PERFORMANCES ARE AT THE JET- NOT AT THE PUMP.**

**REPLACEMENT PARTS:**

- 1 Solenoid valve coil (specify voltage).
- 2 Solenoid valve diaphragm.
- 3 Solenoid valve mounting bolt set.
- 4 Solenoid valve mounting seal kit (O-rings)

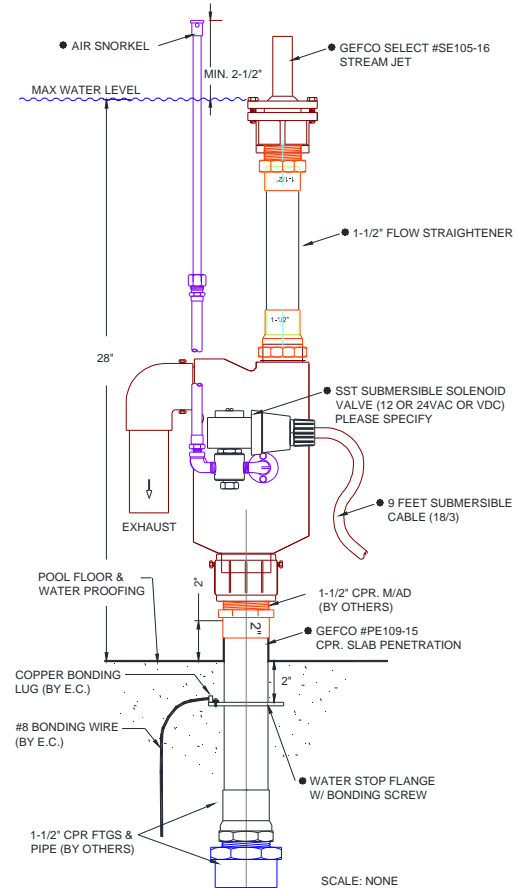

#SE215-1		NEEDED	
T	1-1/2" NPT	SAFE INFO	
DO	1.000"	SAFE INFO	
OH	28.00"	IN PSI:	
SPRAY HEIGHT	GPM	FT. HEAD	EXIT PRESS.
05'	25	35	2.50
08'	30	45	3.50
10'	35	50	5.00
15'	42	70	6.50
20'	55	110	9.00
30'	65	150	13.50

**IMPORTANT REQUIREMENT**

Designers and Engineers shall be responsible for the accuracy of system flow rates and especially system head loss requirements. Stated flows and head pressure requirements for any listed spray height are required AT THE NOZZLE. Extrapolations for unlisted spray heights are at the sole responsibility of the Designers and/or Engineers.

**IMPORTANT**

Dimensions, Manufacturers and/or Materials subject to change without notice